




QM-LAMTXT6: Textured pressure sensitive lamination film with liner

Everyday heavy pressure sensitive laminate with “cold” permanent adhesive. Can be used for floor graphic installations, This laminate has a texture that has passed ANSI slip testing standards. 6 mil PVC base works well with almost any media type, unlike heat-assisted laminates.

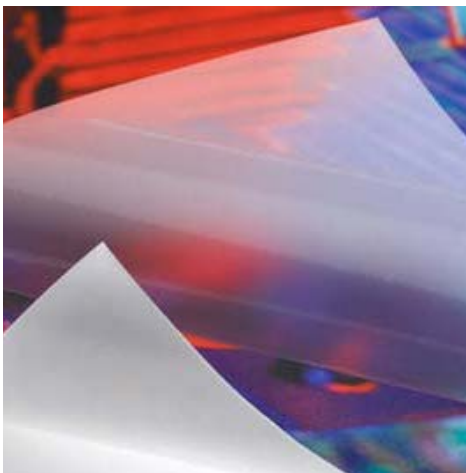

Benefits:

- 6 mil General Purpose Thickness
- Economical
- Ultra Clear Visibility

Applications:

- Short Term Interior Floors
- Floor & Counter Top Advertising
- Sealed Concrete Floor Graphics



Registered Latex Developer



TECHNICAL DATA: TEXTURED PRESSURE SENSITIVE LAMINATION FILM WITH LINER

SURFACE FINISH:	Textured	FACE STOCK CALIPER:	6 Mil +/- 1
BASE MATERIAL:	PVC	DURABILITY:	Indoor: Up to 1 year Outdoor: Up to 6 months
ADHESIVE MATERIAL:	Permanent Solvent Acrylic	ROLL LENGTH:	150 Ft.
LINER MATERIAL:	Kraft w/ PE Coating One Side	ROLL WIDTHS:	38", 54" & 61"
LINER WEIGHT:	80 GSM +/- 10%	CORE:	3"
LINER CALIPER:	4 +/- 1 Mil	PRINT SIDE:	Print Side Out
FACE STOCK WEIGHT:	190 GSM +/- 10%	INK RECOMENDATIONS:	N/A
STORAGE: Up to six months if stored in proper conditions (cool, dry place 50-80°)			



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to six months if stored in proper conditions (cool, dry place 50-80°)

